

## Special Steam Vents


Model 3 Part No. 401419

### Steam Air Line Valve

- Thermostatic vent (no float)
- For Air Line or Paul Systems
- Inlet 1/8" (4mm) NPT, outlet 1/4" (8mm) NPT
- Maximum operating pressure 25 psig (1.7 bar)\* to vacuum
- Maximum pressure 25 psig (1.7 bar)



Steam Air Line Valve  
Model 3




Model 74 Part No. 401428

### Steam Unit Heater Air Valve


- Float-type thermostatic vent
- Single non-adjustable port
- 1/2" (15mm) NPT female and 3/4" (20mm) NPT male straight shank
- Install 6-10" (150-250mm) above horizontal return and 18" (450mm) above the boiler water line
- Maximum operating pressure 35 psig (2.4 bar)\*
- Maximum pressure 35 psig (2.4 bar)



Steam Unit Heater  
Air Valve  
Model 74



## Installation

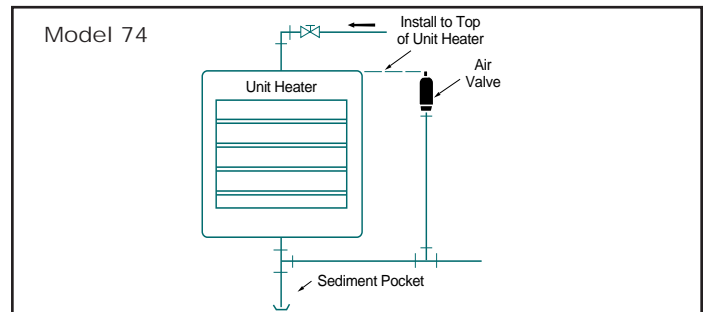


Model 4 Part No. 401416

### Quick Valve


- Thermostatic air vent
- For steam systems and process equipment
- Operates on temperature change only; does not close against water
- Must be installed 6-10" (150-250mm) above horizontal return and 18" (450mm) above the boiler water line
- 1/2" (15mm) NPT female and 3/4" (20mm) NPT male straight shank
- Maximum operating pressure 25 psig (1.7 bar)\*
- Maximum pressure 25 psig (1.7 bar)



Quick Valve  
Model 4



## Installation

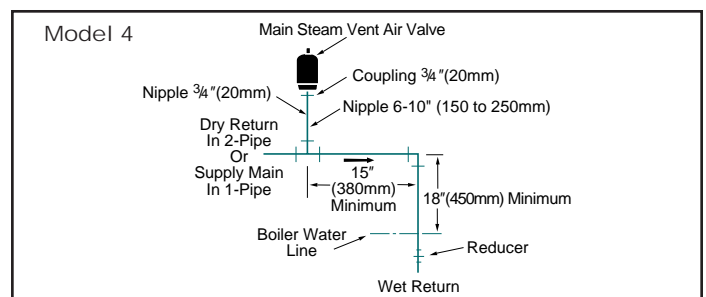

To prevent steam vents from sputtering water or damage from water hammer, observe the minimum elevations shown.

\*Drop away pressure (maximum pressure against which the vent can open).