


Series B **BEARTRAP®**

NEW

Series B6

- Available in sizes 1½" and 2" (40 and 50mm) NPT
- Maximum capacity 20,000 lbs./hr. (9072 kg/hr.)
- Meets Mil specification WW-T-696-E Type I, Style B, Class 1-7
- Completely drains condensate and air at saturation temperature
- Stainless steel internal components
- Resistant to moderate water hammer
- Bottom inlet and top outlet
- Internal parts mounted on cover for easy service
- Maximum temperature 406°F (208°C)
- Maximum pressure 250 psig (17.3 bar)

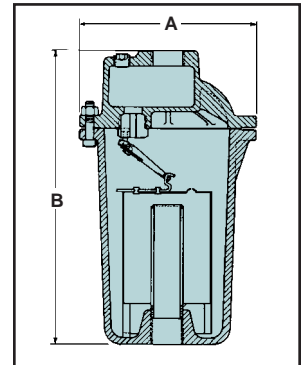

Dimensions, in. (mm)

Series	NPT Size in. (mm)	A	B
B6	1½, 2 (40, 50)	10¾/16 (258)	17 (432)

Materials of Construction	
Part	Specifications
Body and cover	Cast Iron 30,000 psi tensile
Valve Pin and Seat	Stainless Steel (Hardened)
Bucket	Stainless Steel
Lever Assembly	Stainless Steel

Ordering Information

Model Number	Part Number	NPT Size in. (mm)	Differential Pressure psi (bar)
B6025A	404690	1 ½ (40)	25 (1.7)
B6040A	404691	1 ½ (40)	40 (2.8)
B6125A	404692	1 ½ (40)	125 (8.6)
B6250A	404693	1 ½ (40)	250 (17.3)
B6025A	404694	2 (50)	25 (1.7)
B6040A	404695	2 (50)	40 (2.8)
B6125A	404696	2 (50)	125 (8.6)
B6250A	404697	2 (50)	250 (17.3)